



**JOHN  
GEORGE**

Delivering Performance Since 1725

johngeorge.co.uk  
sales@johngeorge.co.uk

Wholesale distributors to merchants  
in the building, roofing, fencing and agricultural trades

# Peep Weep Vent

Provides an unobtrusive solution to cavity wall drainage requirements.

The weep features a mortar key to ensure adhesion to the building fabric and an external rib to aid positioning.

The rib surrounds a 62mm high opening to prevent mortar blockage from within the cavity. The weep's protective hood which, when fitted, "peeps" out from the brick fascia, is designed to guard against blockage during installation and stops penetration of wind driven rain.

The exit hole is ample for water drainage but small enough to prevent entry of large insects.

## Product Information



### Installation

1. Should be simply fitted in open perp joints and mortared in position leaving approximately 10mm protruding from the brick face.
2. The peep weep should be spaced at no greater than 900mm centres but to meet HNBC guidelines "weep holes are recommended to be sited at every 450mm maximum with at least two per opening above all windows and doors".
3. To extend the peep weep vent (for wider than 100mm), use along with a standard weep vent – place (open end to open end) together and seal the joint with sealing tape, after first removing the drip lip from the standard weep vent (see figure 1).
4. The peep weep vent and standard weep vents can be cut down from the open ends if required to suit different bed sizes.






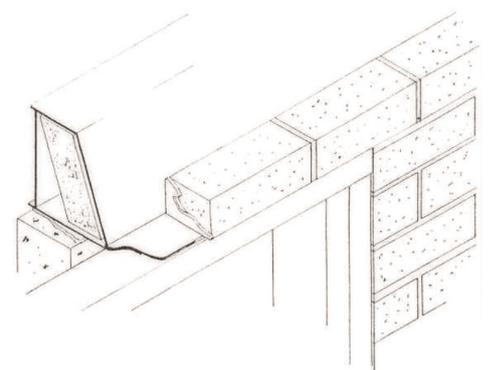


FIG 1

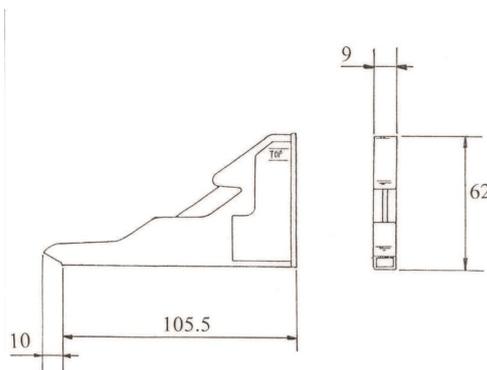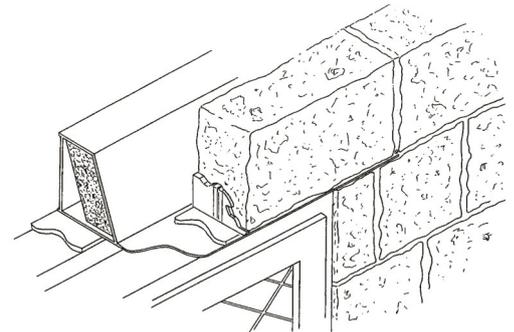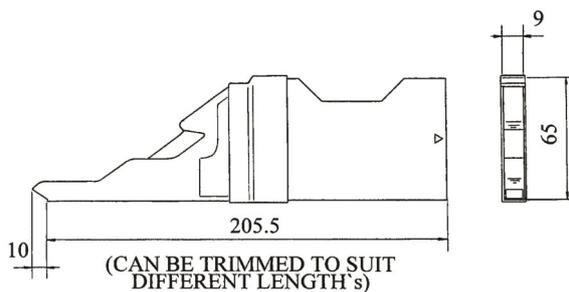

**WEST:**

Tel: 01275 335810 Fax: 01275 349203

**CENTRAL:**

Tel: 0118 941 1234 Fax: 0118 945 1059

**EAST:**

Tel: 01268 663130 Fax: 01268 663131