



**JOHN  
GEORGE**

Delivering Performance Since 1725

johngeorge.co.uk  
sales@johngeorge.co.uk

Wholesale distributors to merchants  
in the building, roofing, fencing and agricultural trades

# Refurbishment Weep Vent

Provides cavity wall ventilation to existing walls to solve the problem of missing or inadequate ventilation.





It is particularly useful in rendered wall constructions where it is notoriously difficult to use traditional built-in weep vents.

Available in 3 colours.

## Installation

1. Mark out the locations for the vents and drill a 25mm diameter hole through the external leaf of the wall into the cavity at a slight upwards angle at these points.
2. Ensure the hole is clear and free of debris before proceeding.
3. Align the tube with the hole, making sure to have the chevrons of the front grill pointing upward and the flat edge of the drip feature horizontal, running parallel with the run of the wall.
4. Push the vent firmly into the hole using the palm of your hand until the back face of the flange sits flush against the substrate.
5. As the ribs along the length of the tube grip to hold the product in position it may require more force to push the vent into the hole - it is acceptable to gently tap the vent into position using a rubber mallet.
6. The vents can be positioned at high or low level to suit the required detail, and should be placed at both high and low level to achieve a cross flow ventilated cavity if required.
7. NHBC Standards 2008-650mm<sup>2</sup> free airflow every 1.2m-space at 480mm centres.
8. Scottish Building Regs 2007-300mm<sup>2</sup> free airflow every 1.2m-space at 1m centres.

## Product Information

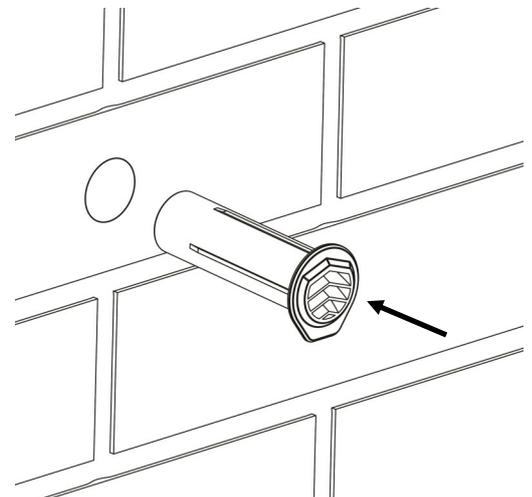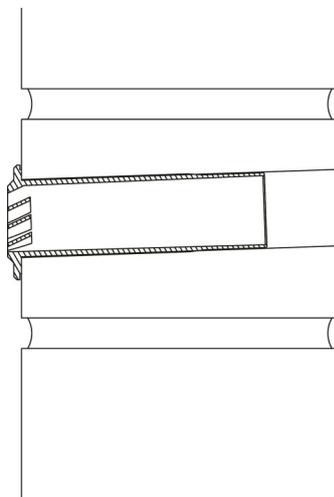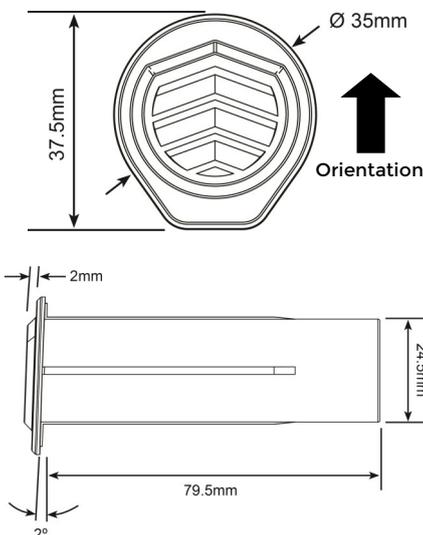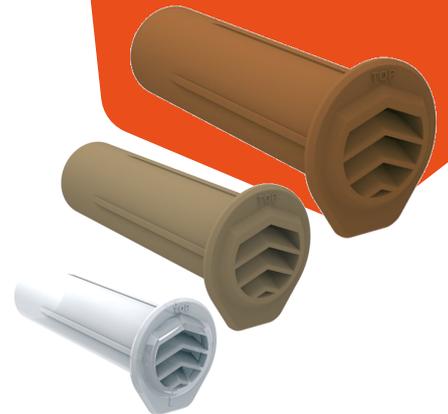

**WEST:**

Tel: 01275 335810 Fax: 01275 349203

**CENTRAL:**

Tel: 0118 941 1234 Fax: 0118 945 1059

**EAST:**

Tel: 01268 663130 Fax: 01268 663131